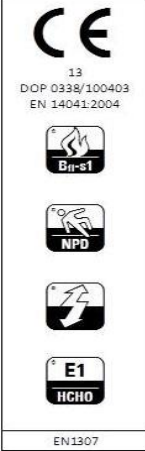


# Milliken Colours 2.0


## Plain & Patterns

<b>Construction</b>	Fusion Bonded Cut Pile	
<b>Face Fibre</b>	Nylon 6 6	
<b>Finished Face Weight</b>	950 gsm	
<b>Tuft Density</b>	272,000/m <sup>2</sup> +/- 10%	
<b>Finished Pile Height</b>	5mm +0/-0.5%	Synthetic Hardback with minimum 70% pre consumer recycled content
<b>Standard Backing</b>		
<b>Nominal Total Thickness</b>	8.1mm +/-10%	
<b>Tile Size</b>	457.2 x 457.2mm	
<b>Nominal Total Weight</b>	4000 gsm	
<b>Tiles per Box</b>	20 (4.18 m <sup>2</sup> )	

<b>PERFORMANCE</b>	
<b>Flammability (Euroclassification EN13501:1-2002)</b>	Class Bfl - s1
<b>Flammability (Radiant Panel ASTM-E-648)</b>	Class 1
<b>Flammability (Hot metal nut BS4790)</b>	Low radius of Char
<b>Use Classification (EN1307)</b>	Class 3 3 Heavy Commercial Use
<b>Castor Chair (EN985)</b>	Class A suitable for Continuous Use (R>2.4)
<b>Static Electricity (ISO 6356)</b>	≤ 2.0 KV, Permanent Conductive Fibre
<b>Conductivity (ISO 10965)</b>	IBM / ICL pass
<b>Impact Sound (ISO 140-8)</b>	26 dB
<b>Sound absorption (ISO 354)</b>	0.2 Class E

<b>ENVIRONMENTAL</b>	Manufactured in accordance with ISO14001 Manufactured using electricity from renewable sources 43% Total recycled content
----------------------	---

Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request.

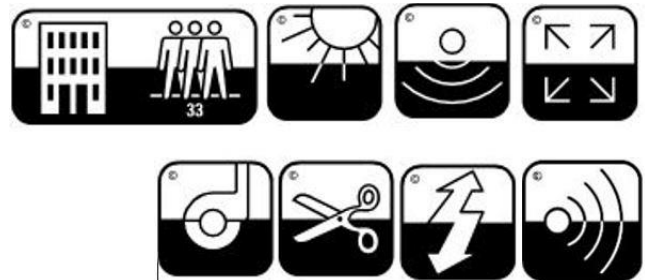

**Warranties:**  
 10 year wear warranty  
 Lifetime Antistatic warranty  
 Latent Defects warranty

**Installation Method:**  
 Monolithic

